


PRODUCT INFORMATION AND INSTALLATION GUIDE

## **Product Specifications & Features**

 Cabinet/Table Top Mount IR Receiver with Talk Back LED terminated to a 6.5 foot/2.0M length of 4/C cable and a Quad 3.5mm mini plug. May be connected in parallel sequentially. [Cable Designation: Orange - 12VDC, Blue – Ground, Purple – Status and Yellow – IR. Refer to cable diagram below]




- 2. Infrared Frequency Bandwidth: 38KHz (± 2KHz); operates with most remotes.
- 3. Reception Distance On-Axis: Up to 50 feet indoor, 15 to 20 feet in direct sunlight. Range depends on device being controlled and levels of IR and EMI interference.
- 4. Reception Off-Axis: Up to a distance of 20 feet at ±45 degrees.
- 5. Visible Blinking-Talk Back LED: Red LED indicator confirms receipt of IR codes.
- 6. Power requirement: 12VDC/500mA or higher Power Adapter

## **Product Installation**

- 1. Please refer to system diagram below.
- It is not recommended to connect without a connecting block or directly to a power adaptor.Be sure the green LED illuminates on the C21, C41 or C61 when plugging in the power adaptor.
- 3. The RT34.1 is PDP/LCD Friendly and CFL Proof; this IR Receiver can be installed within inches of either a PDP/LCD or in Direct Sunlight and operate effectively!

## Installation Diagram

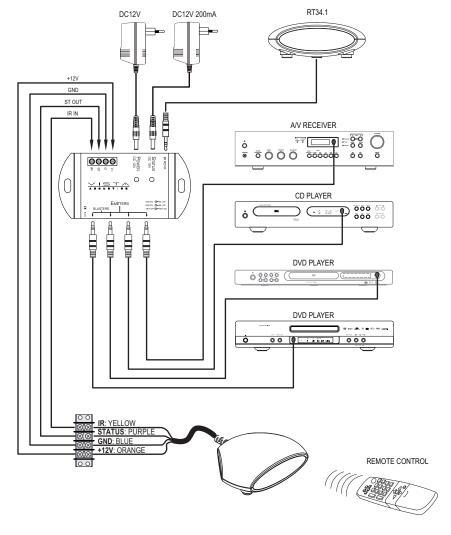

In North America contact:

Trends Electronics International Inc. - 100 – 980 West 1st Street. North Vancouver, B.C. V7P 3N4 Phone: 1 (877) 946-9255 Fax: 1 (800) 618-7363 Email: orders@trendsinc.com